


For formal procedures checking is done at run time; agreement is forced at this stage.

describes formal parameter

I points to actual param.


if W14 non zero at exit then a checking primitive is compiled.

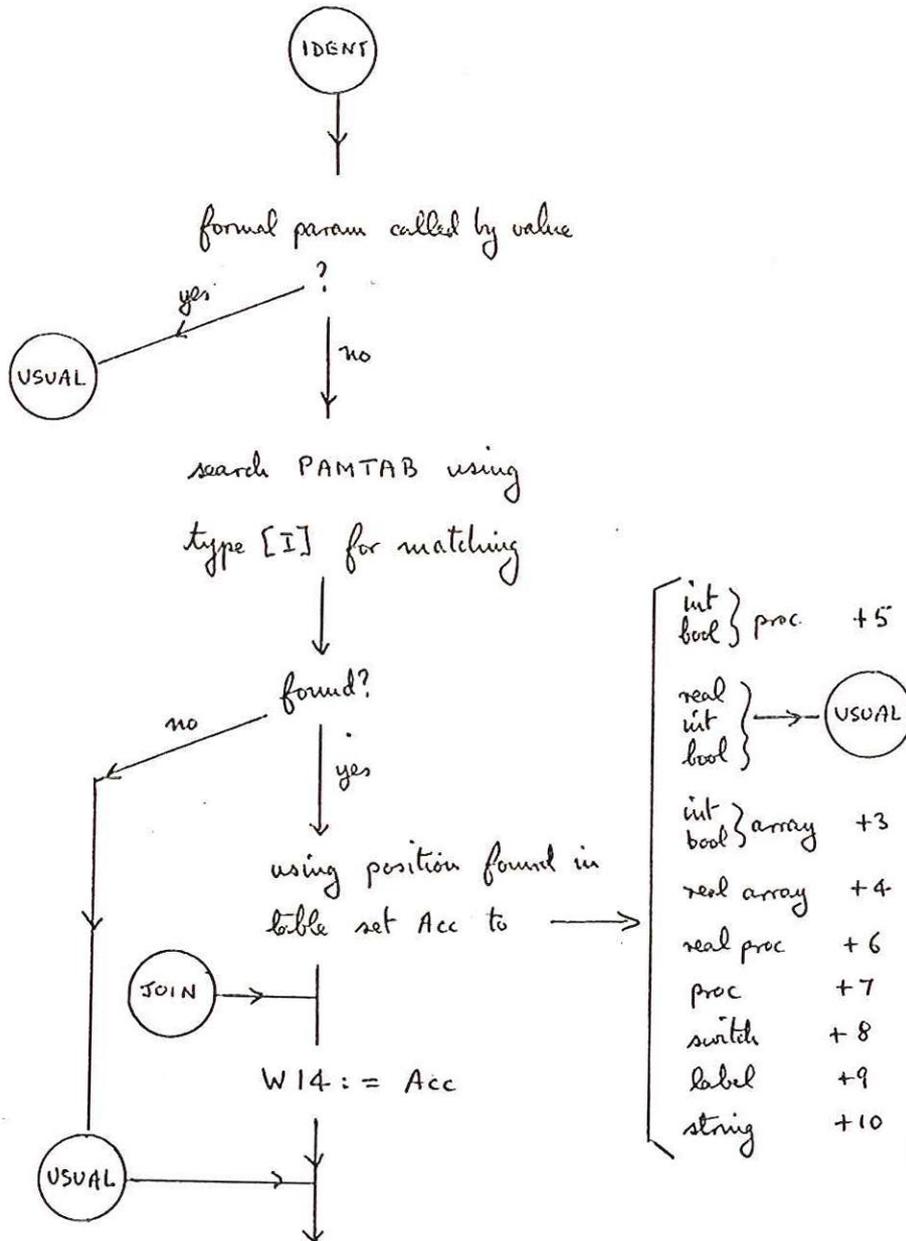

int } proc	+5
bool } proc	+5
real } array	+3
int } array	+3
bool } array	+3
real array	+4
real proc	+6
proc	+7
switch	+8
label	+9
string	+10


actual param search

w14 not altered in this case

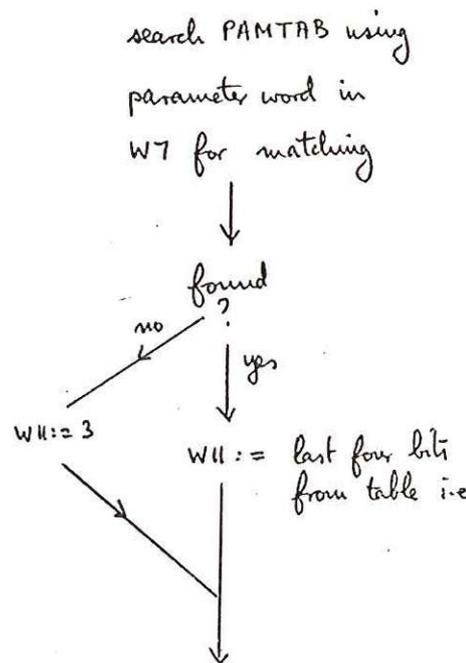

0	value } array } or string
1	label by value
2	scalar by value
4	procedures and arrays called by name
5	switch or label
6	real by name
7	int or bool by name


formal param search

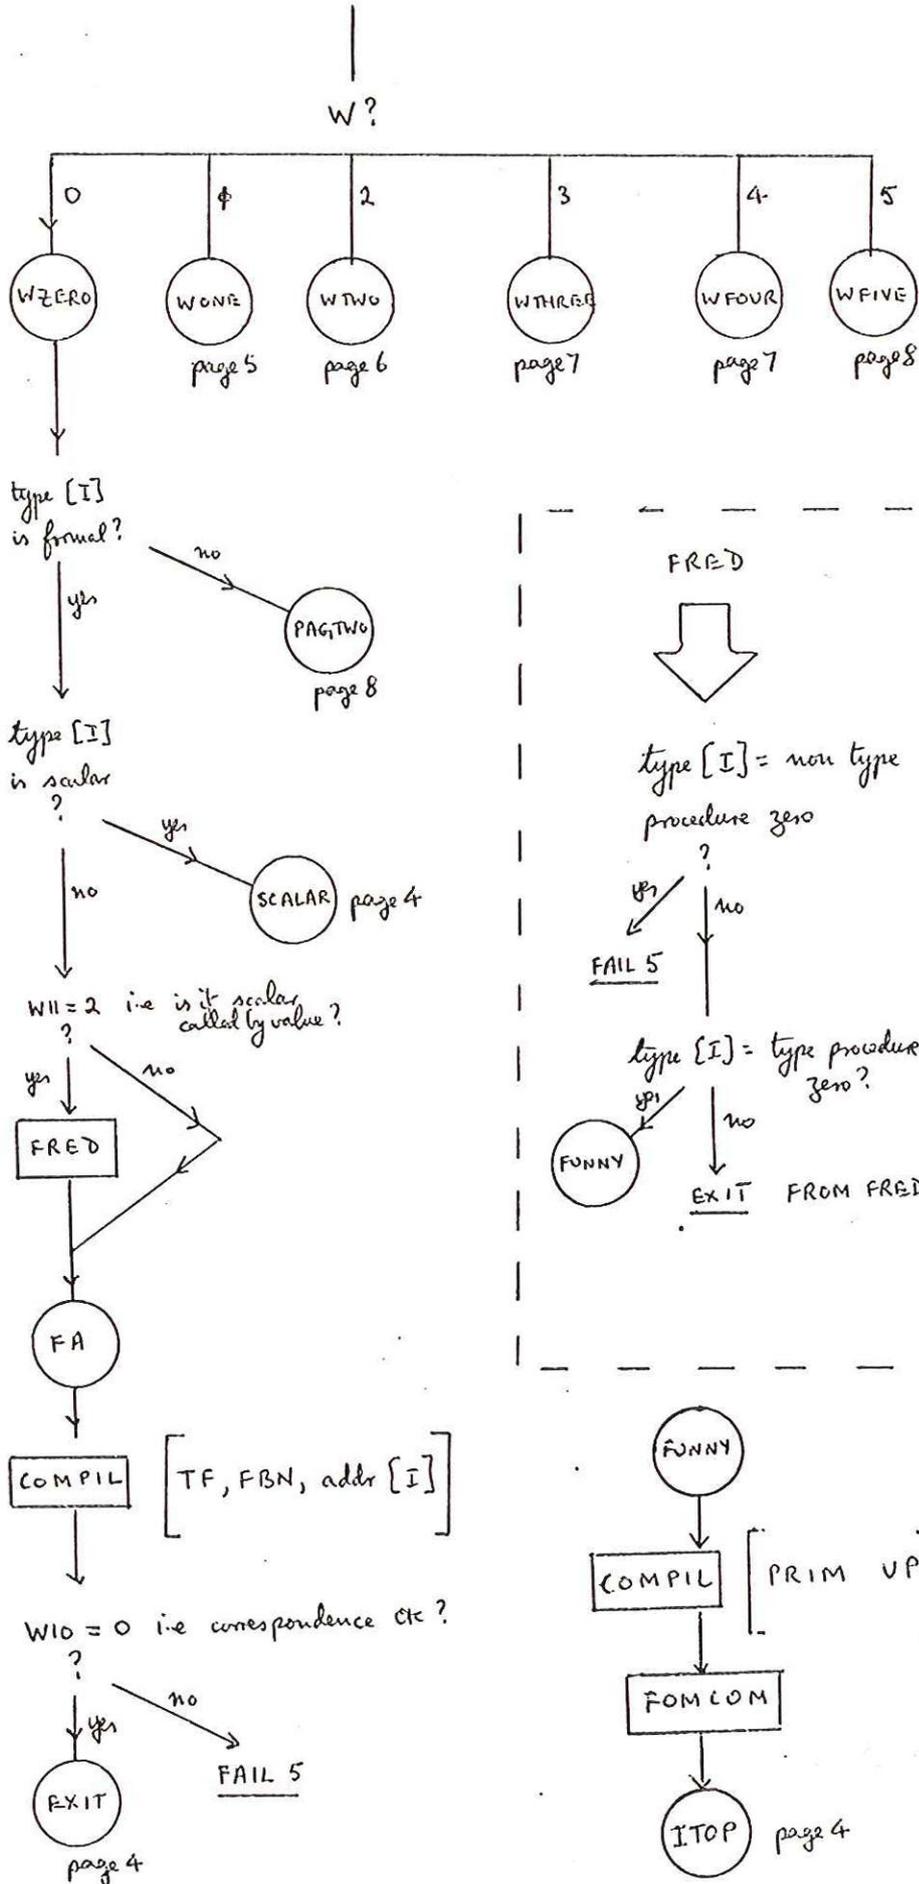


local subroutine with exit to FUNNY



PRAMCH continued

a formal param
is used here as
an actual param

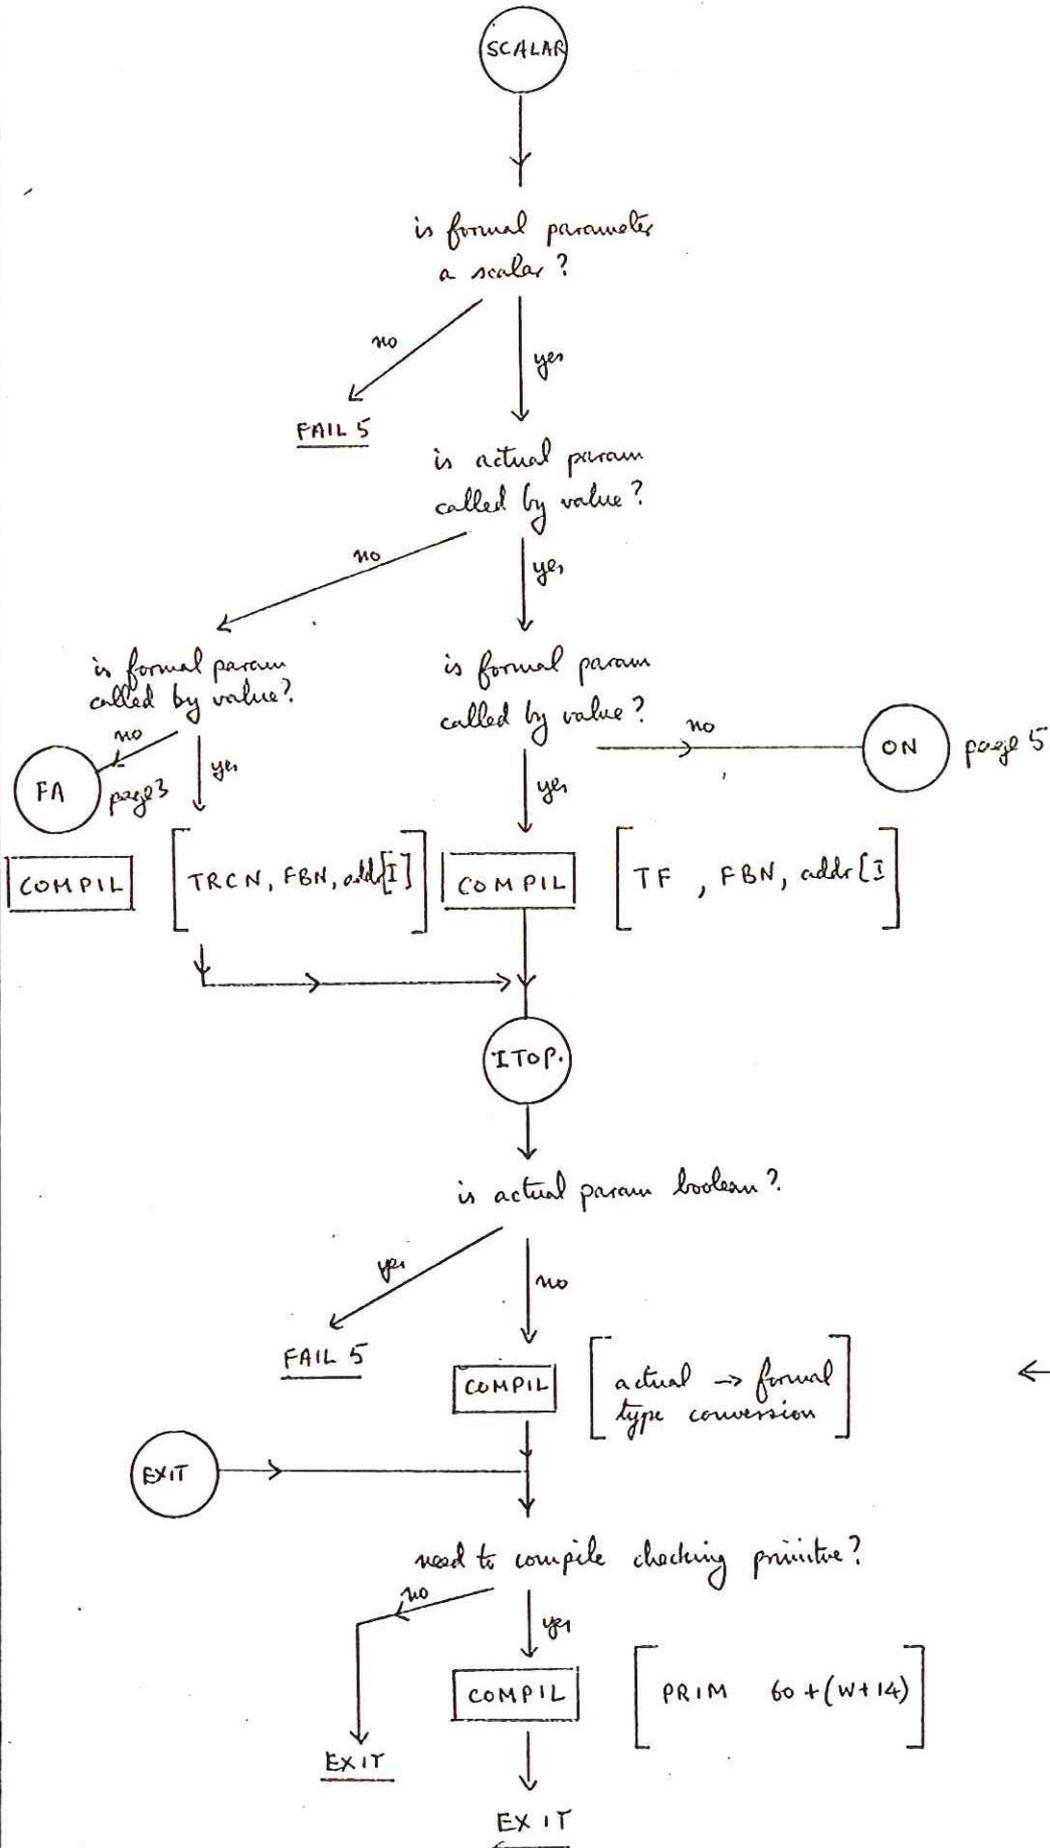



← if no conversion
is necessary
this is skipped

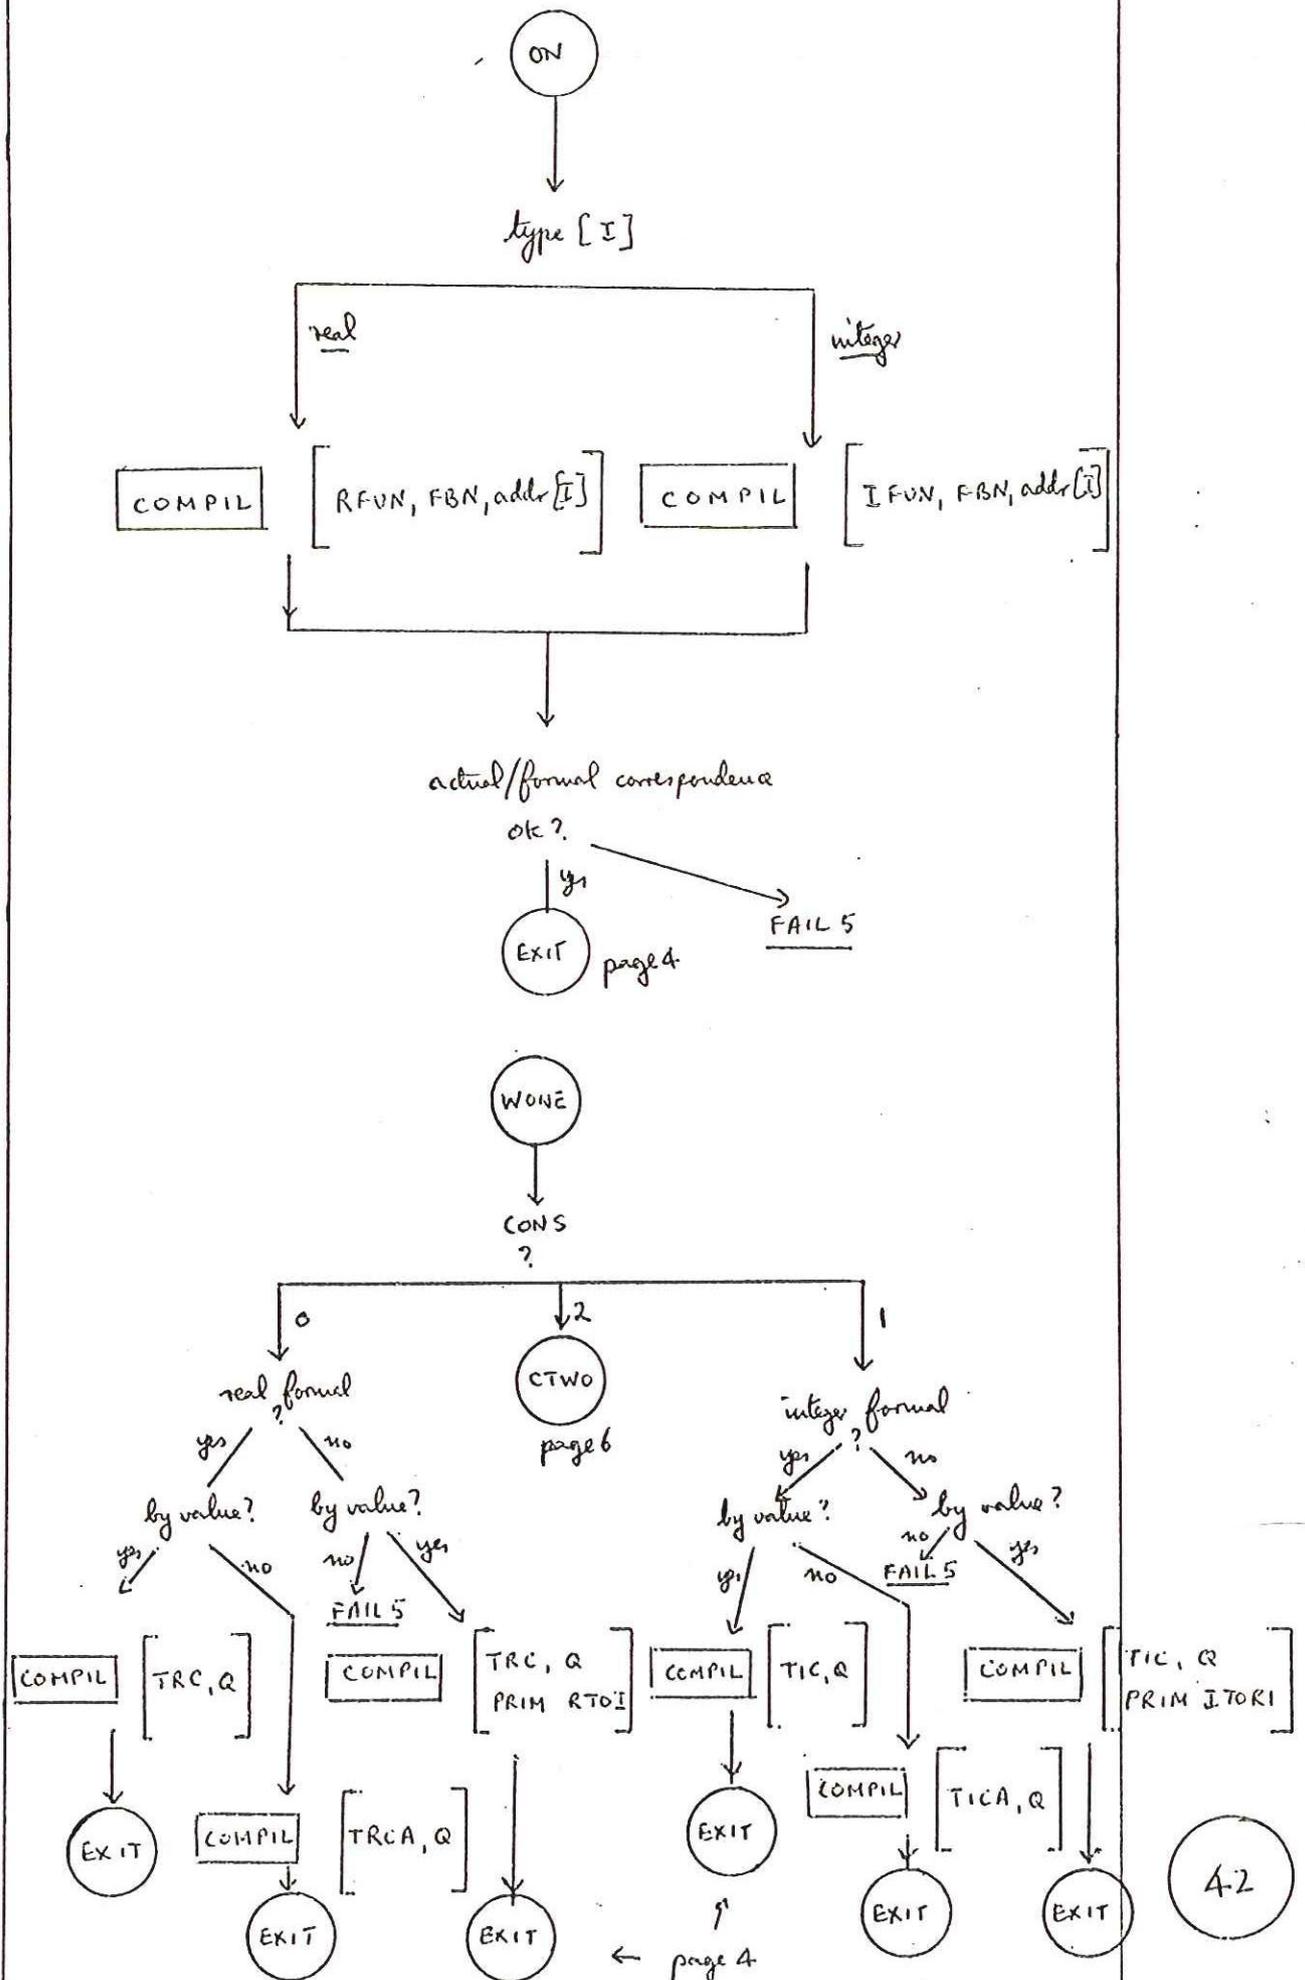

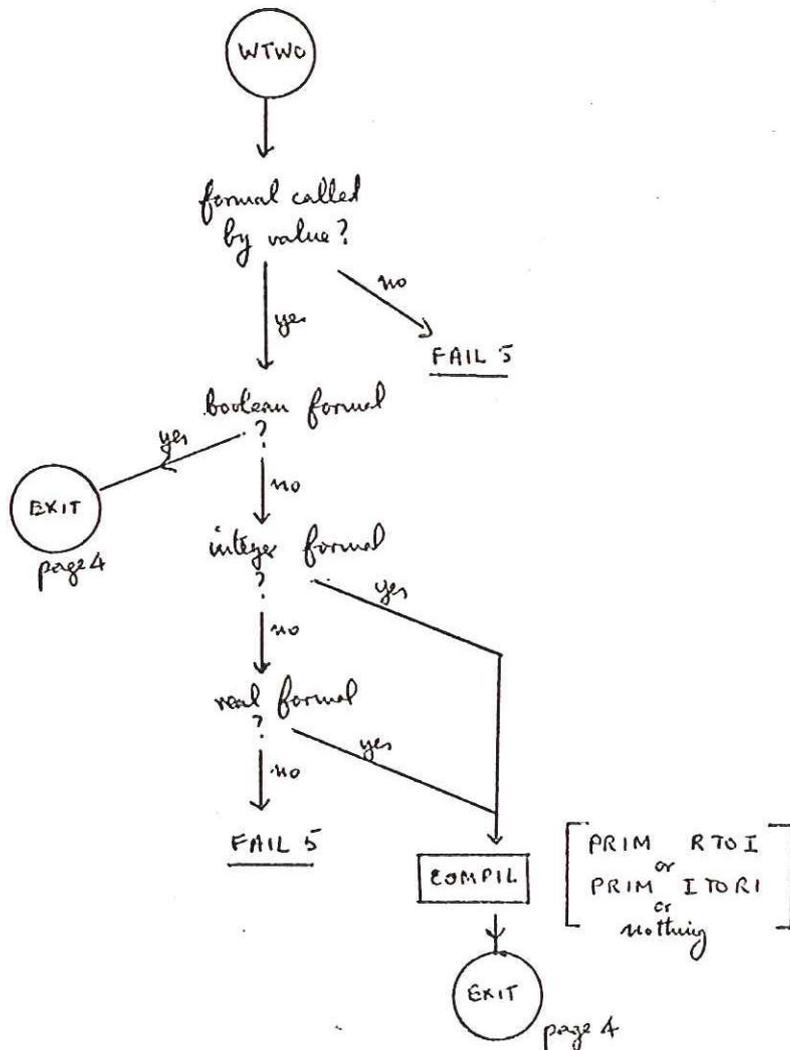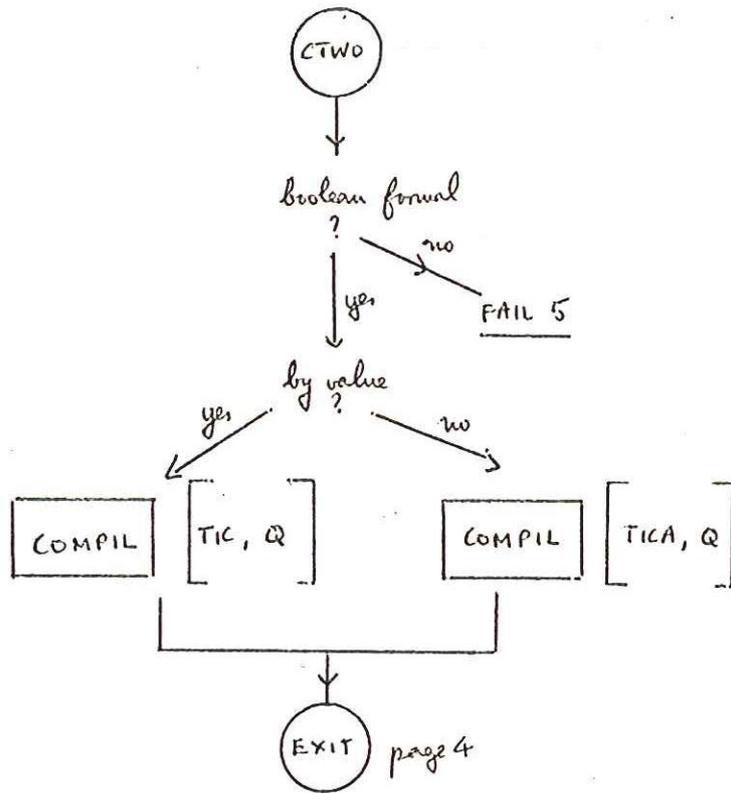

43

depends on
TYPEBOX to
convert type
from actual
to formal

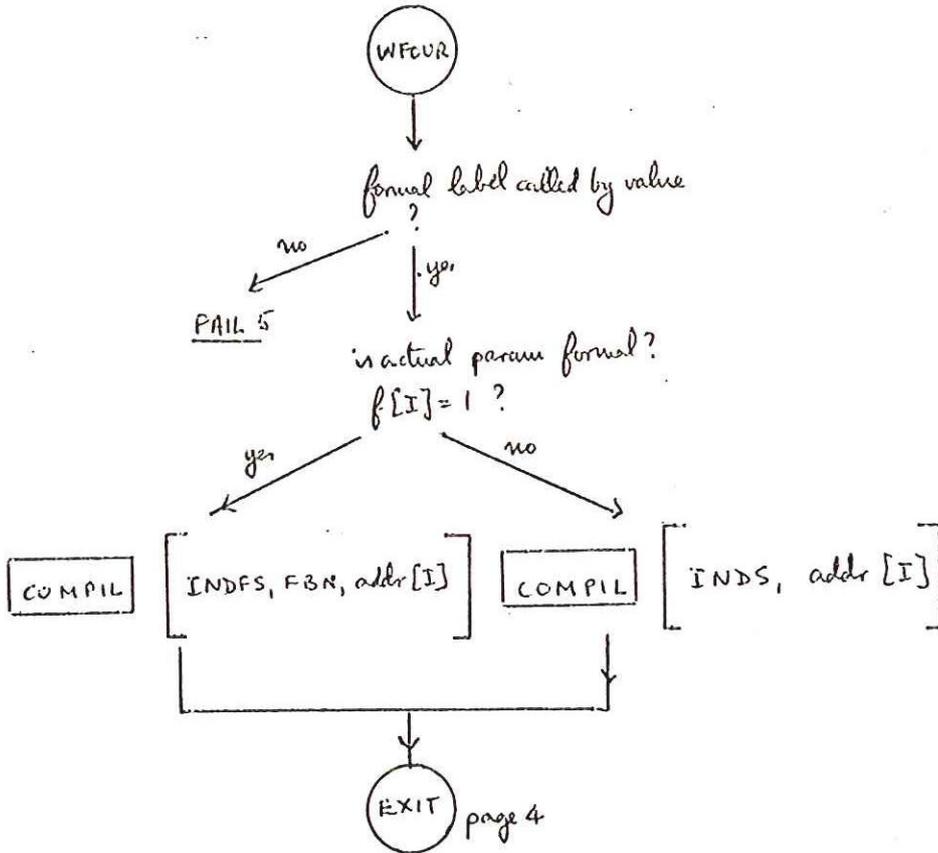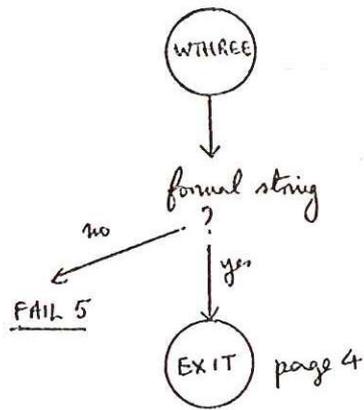

PRAMCH continued

